A photograph of a bed with white linens and a patterned rug. The bed is in the upper half of the frame, with white pillows and a white sheet. The rug is in the lower half, featuring a complex geometric pattern of interlocking lines in shades of brown and tan. The lighting is soft and warm, creating a cozy atmosphere.

CÉRÀGRÈS  
LUXE


## HERITAGE

---

The Connoisseur's Collection




# HERITAGE

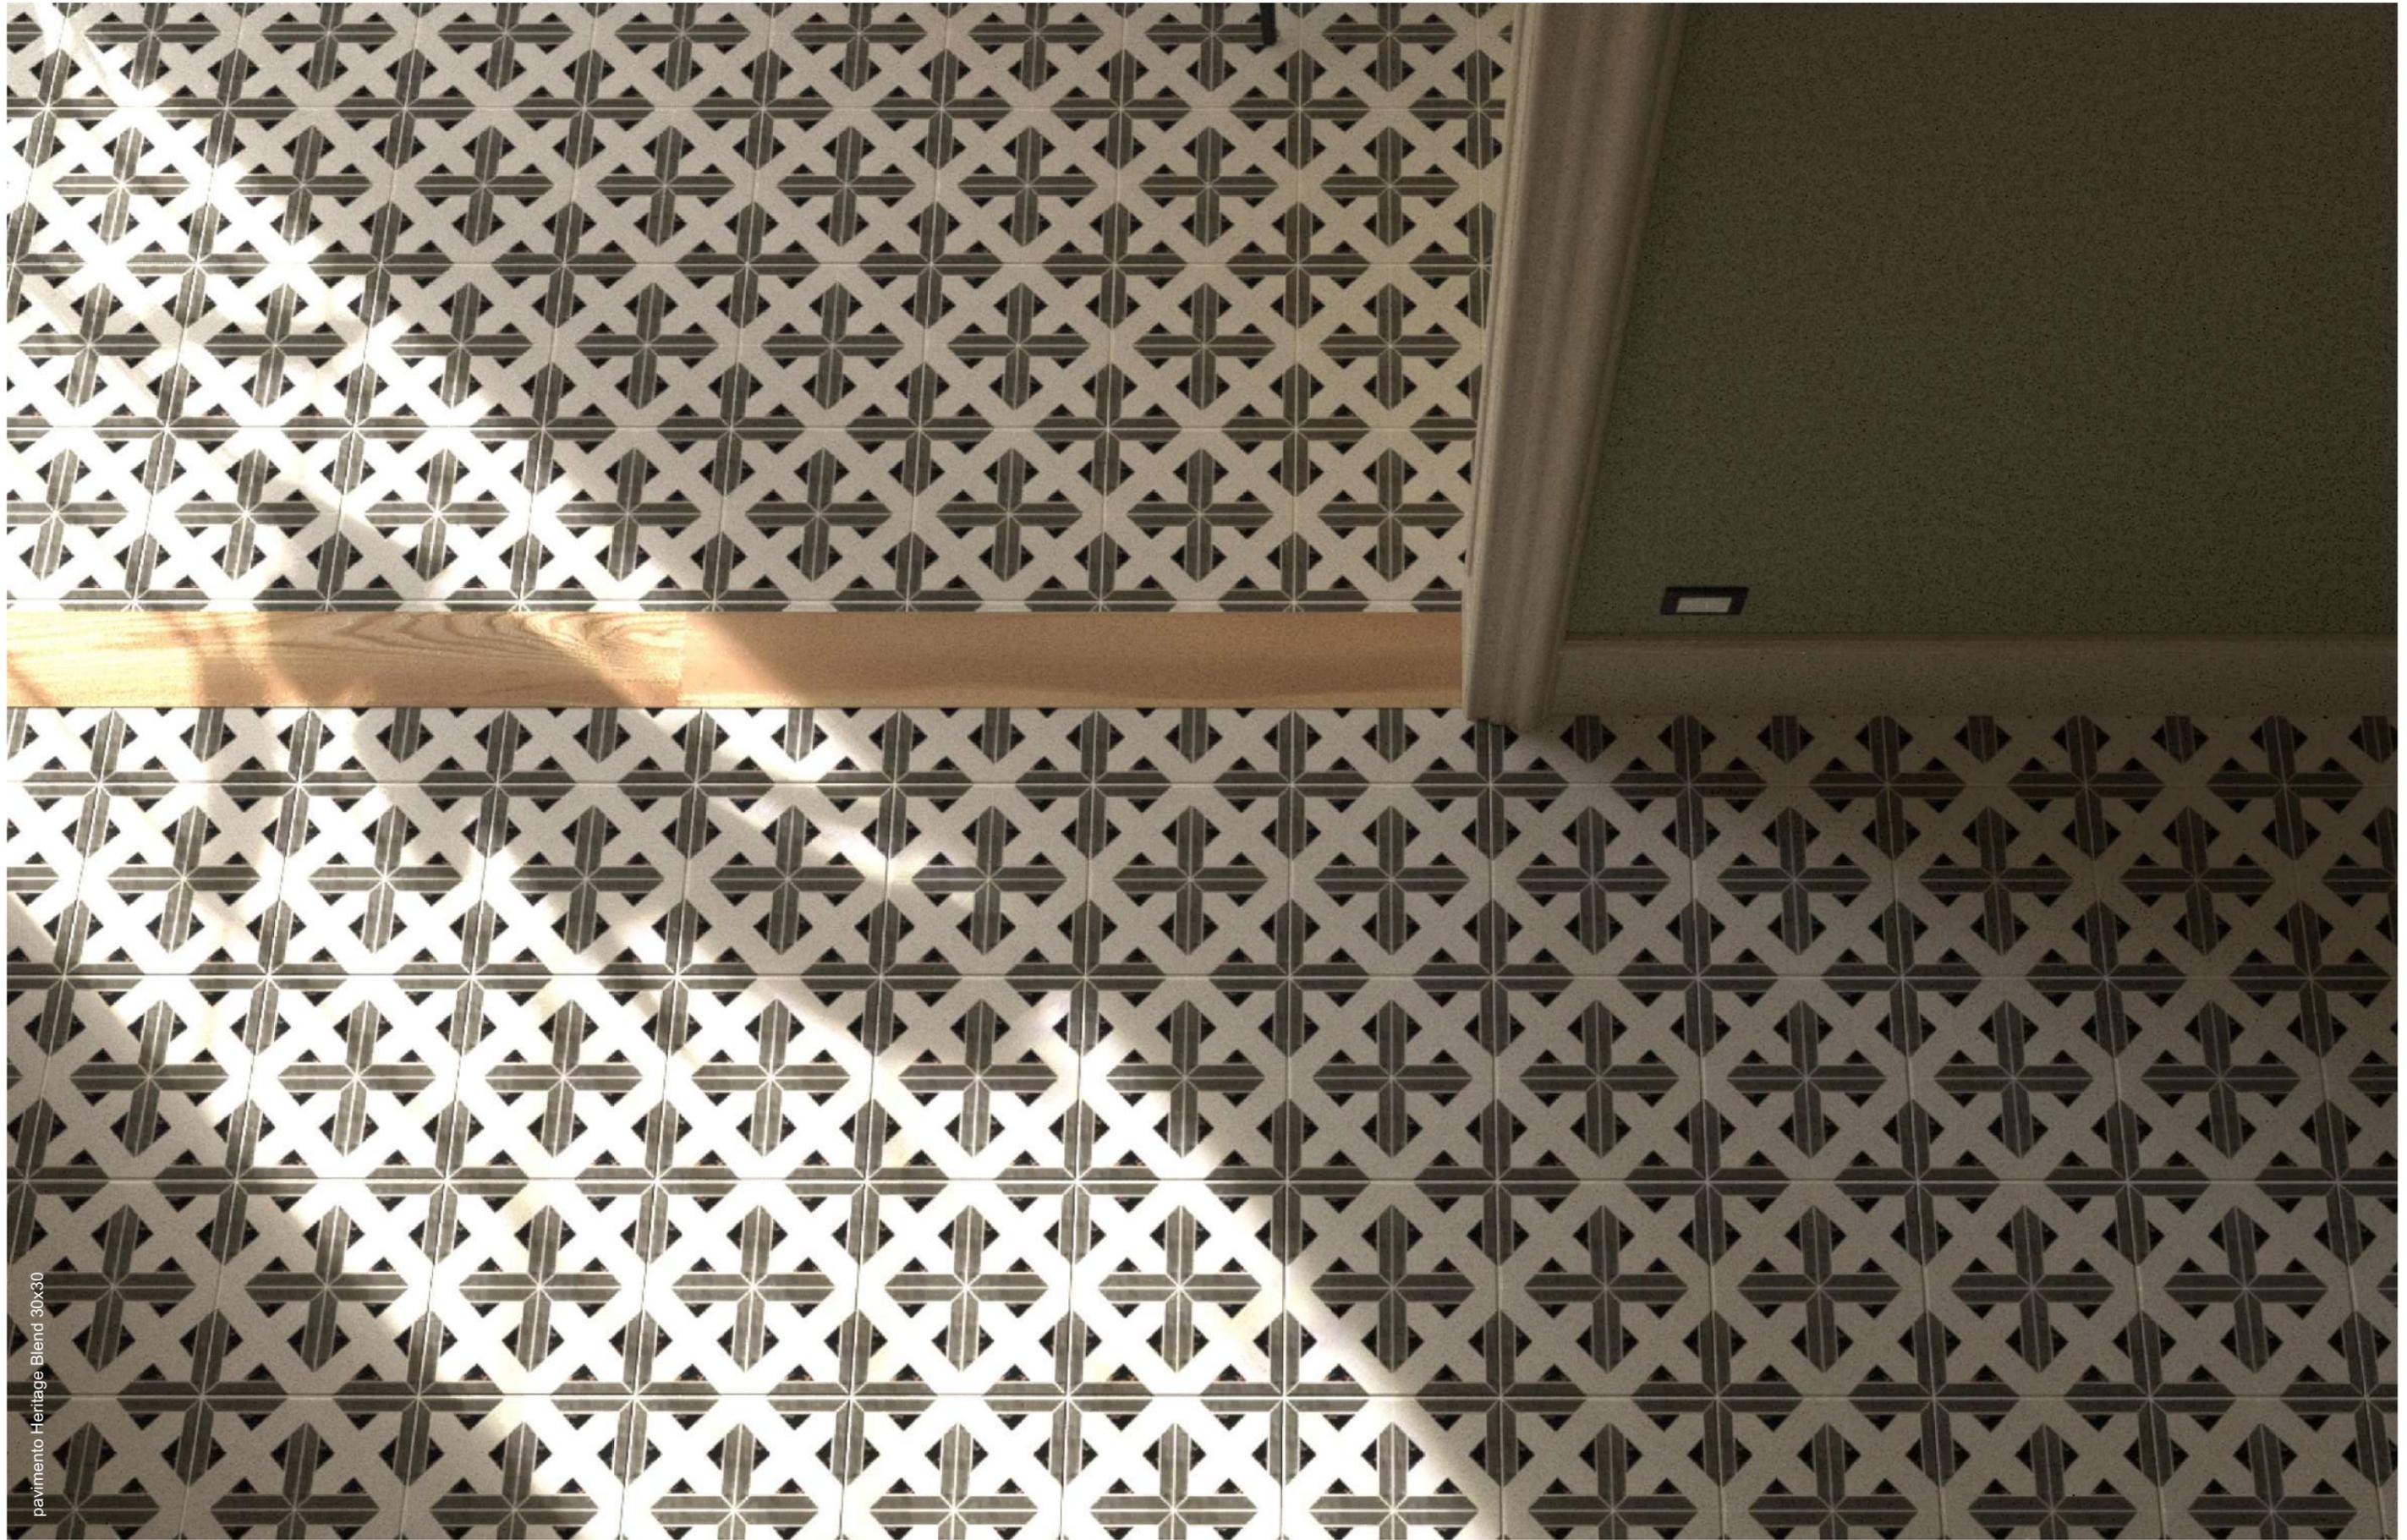

pavimento Heritage Blend 30x30






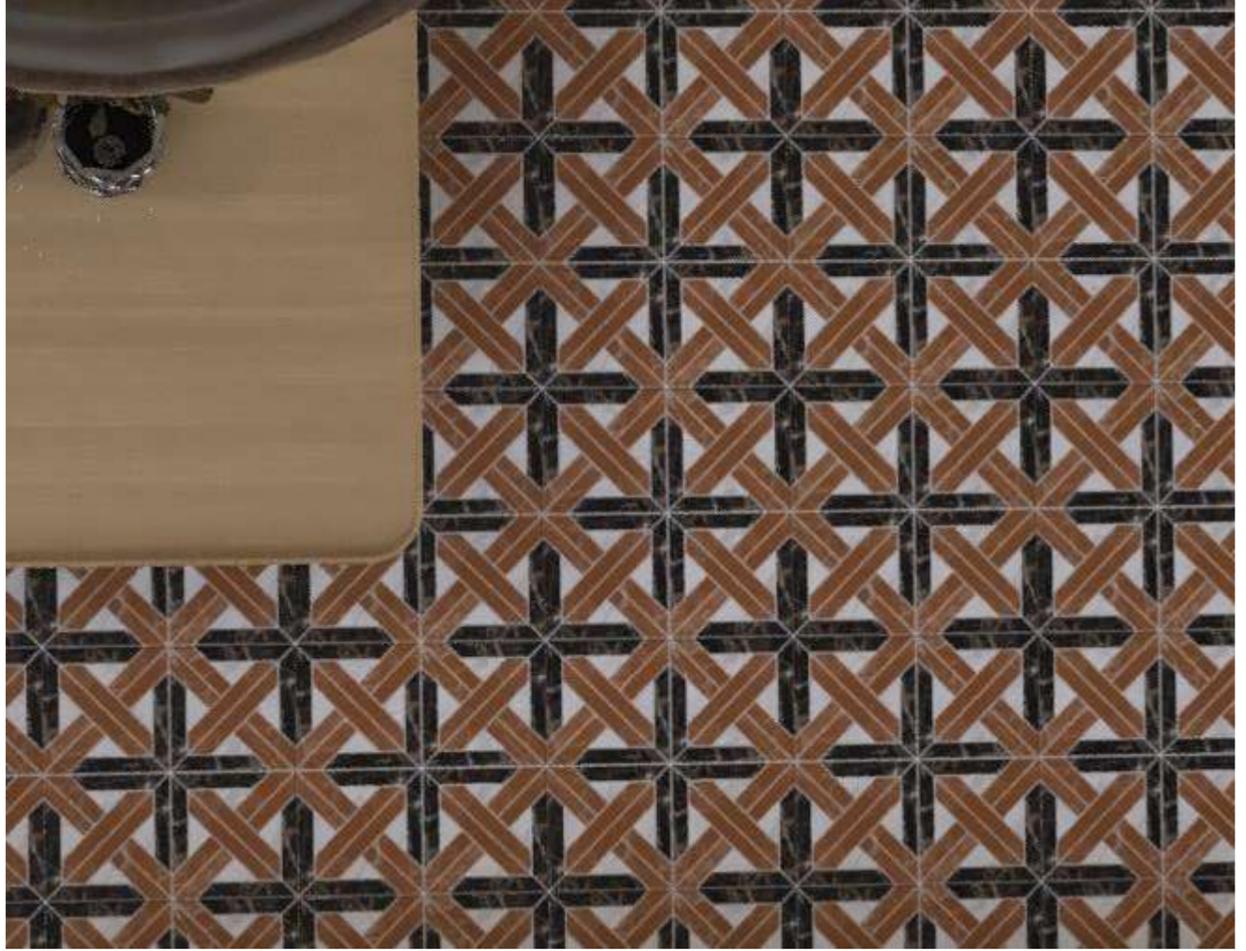



pavimento Heritage Bits 30x30

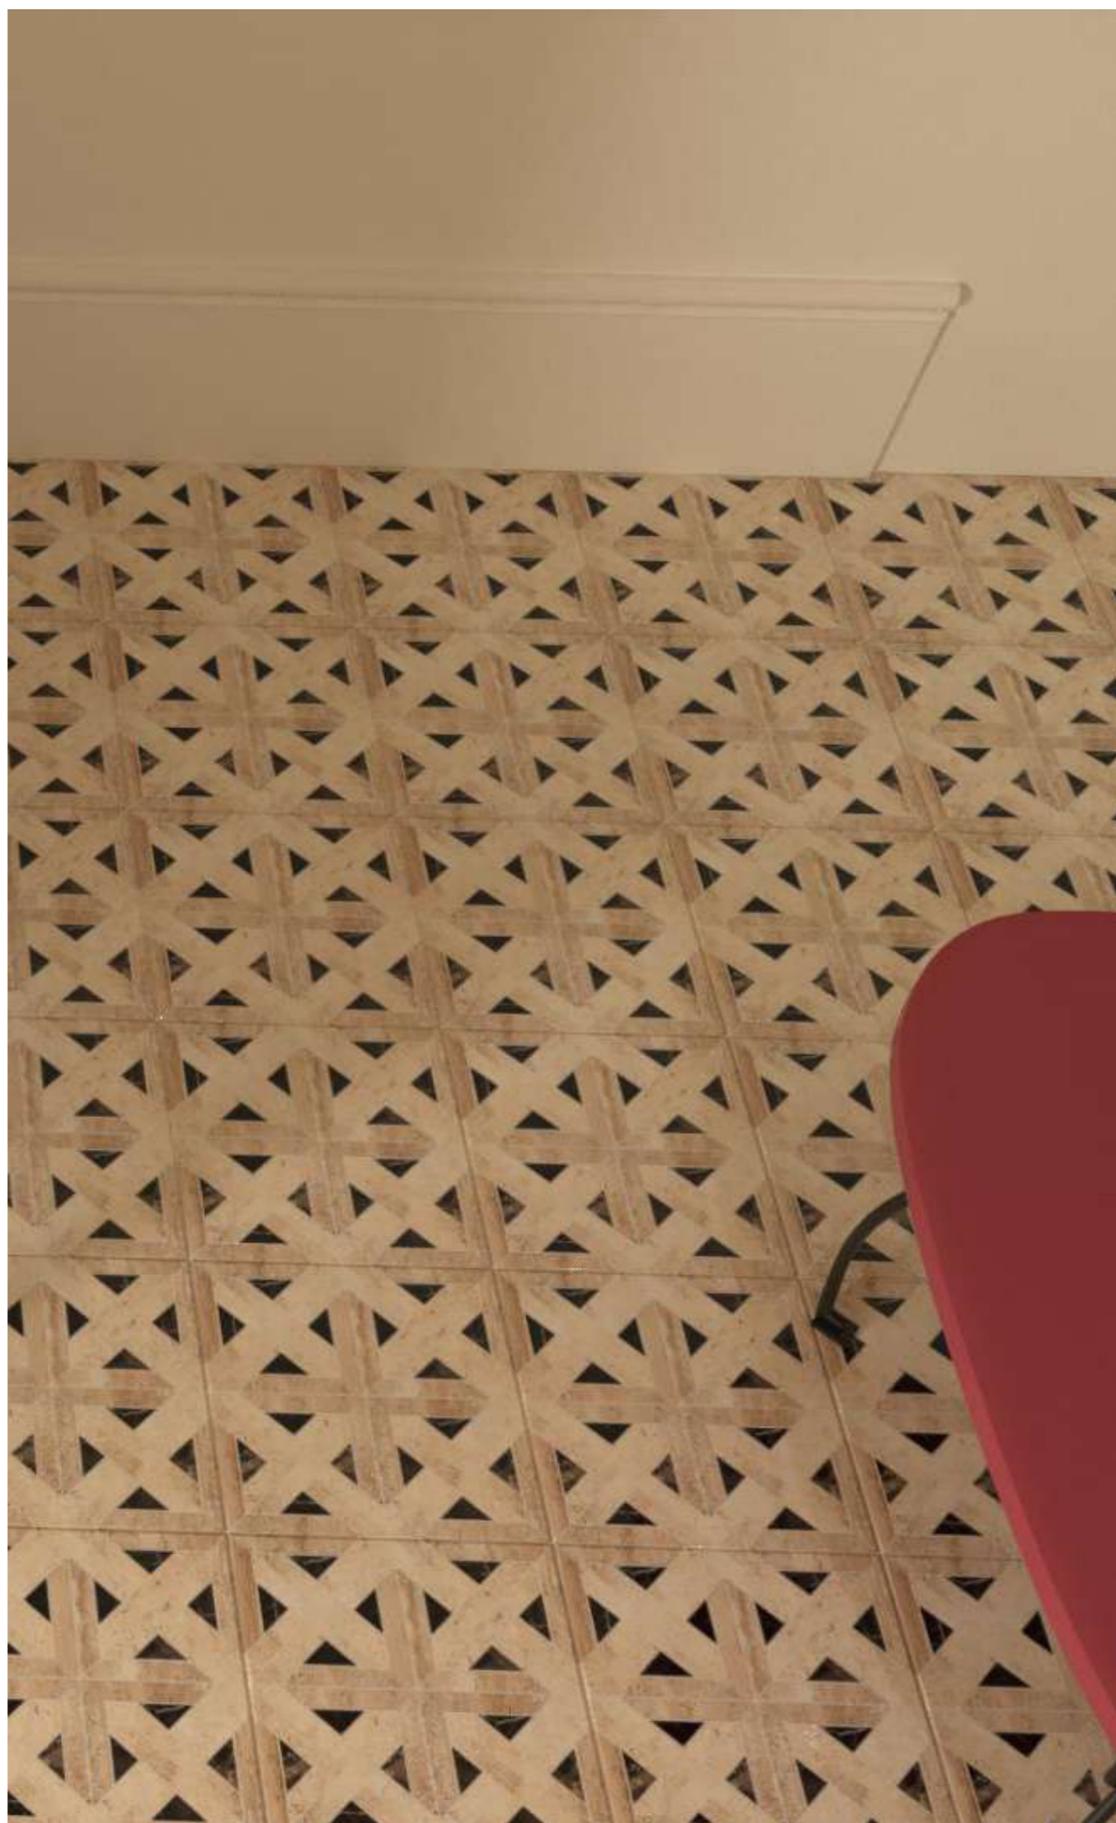












pavimento Heritage Gala 30x30

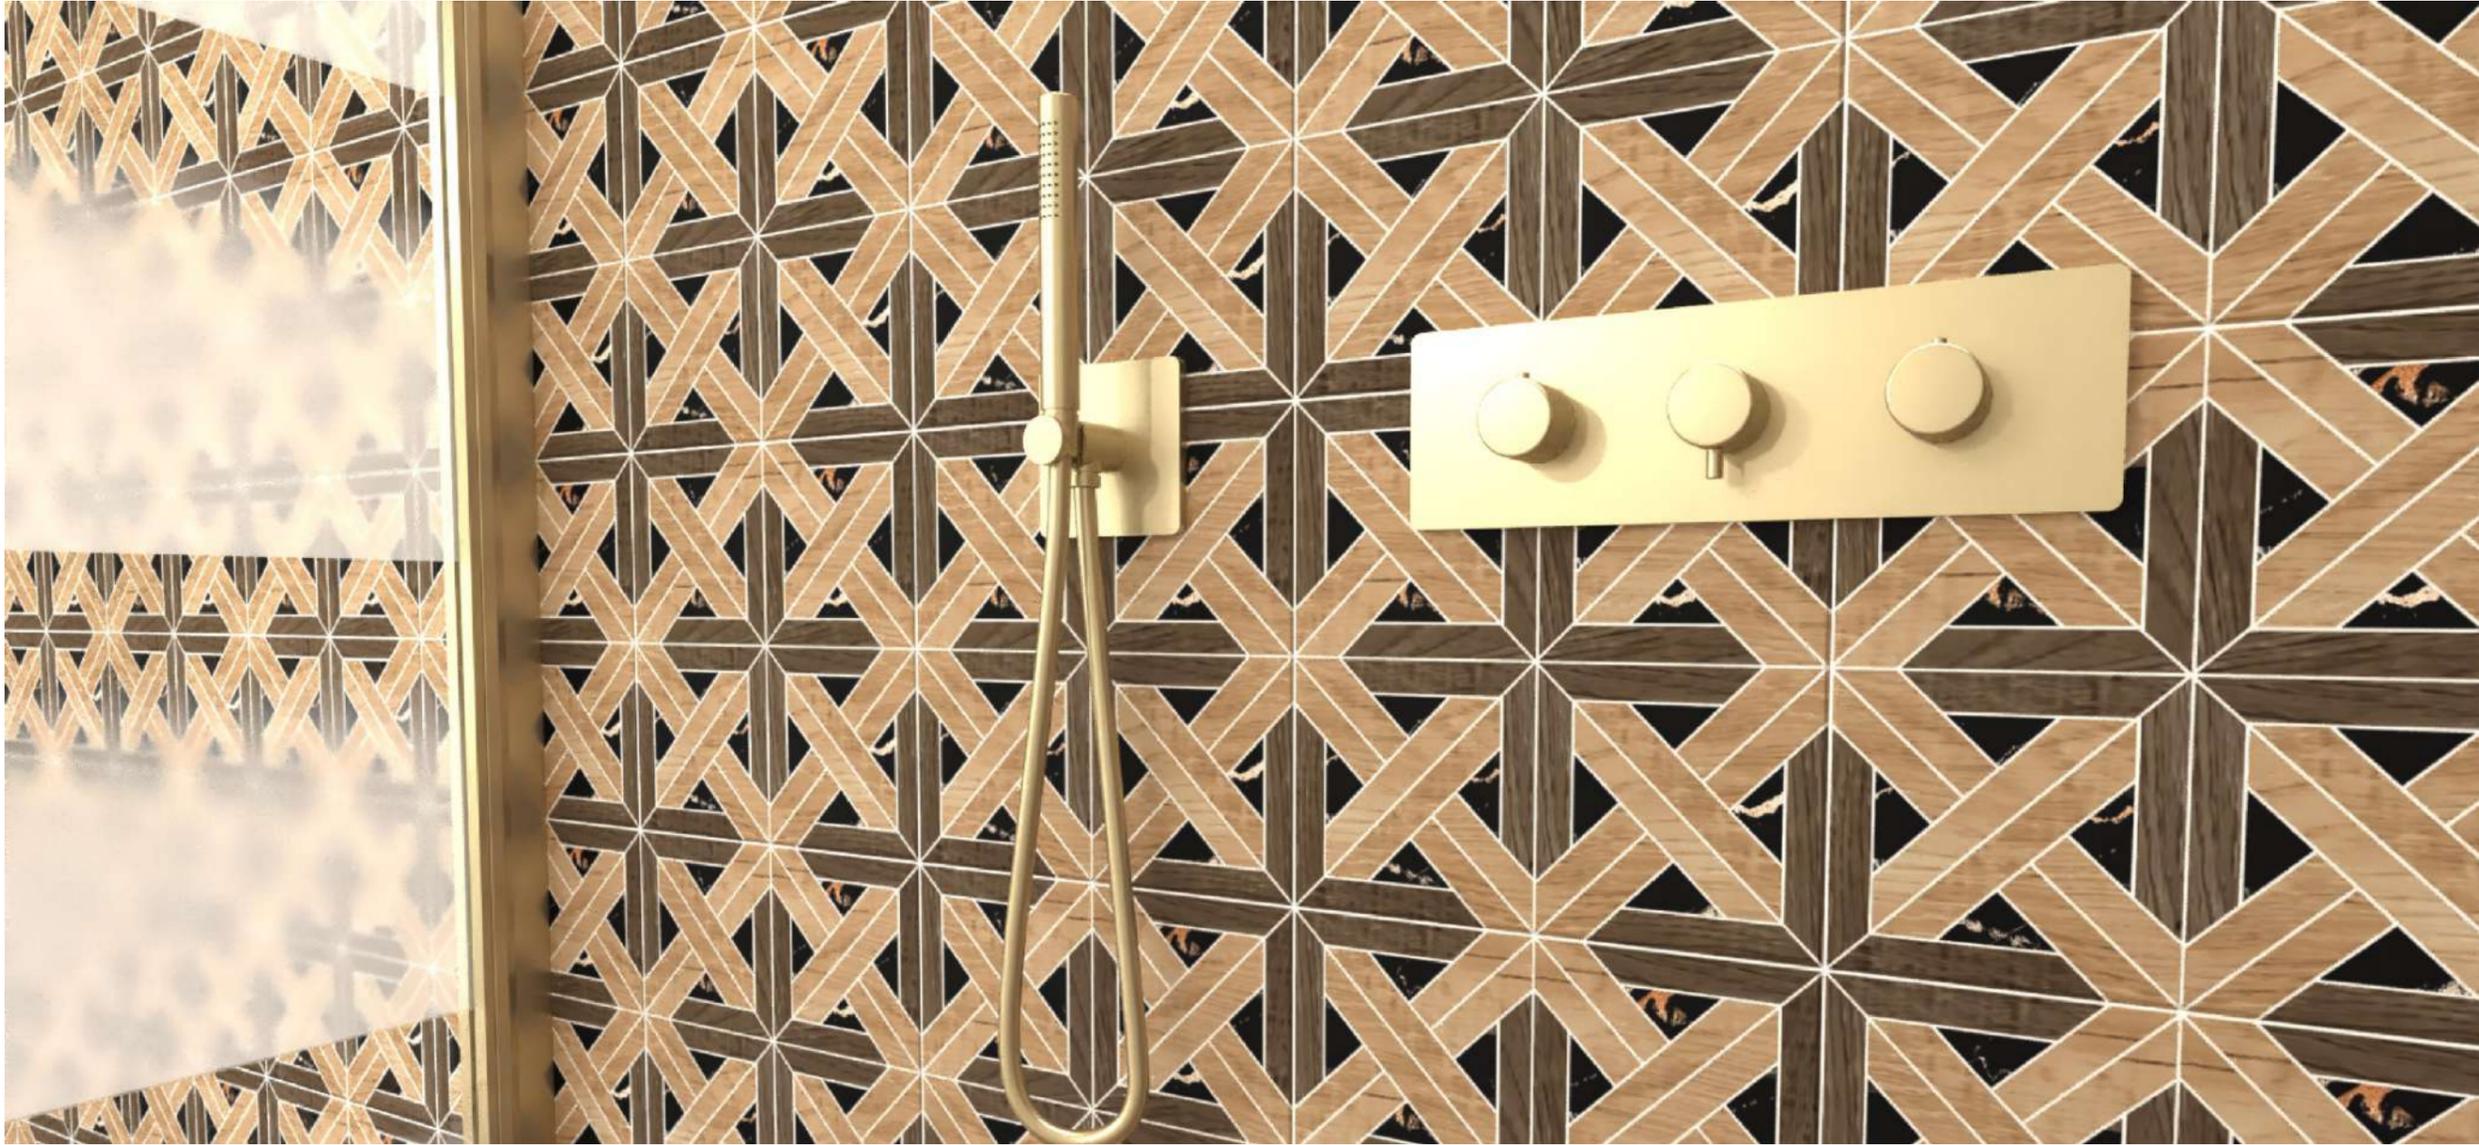

# HERITAGE

gli effetti  
the effects  
les effets  
los efectos

le dimensioni  
the sizes  
les tailles  
los tamanos


I colori  
the colours  
les couleurs  
los colores

le caratteristiche tecniche  
the technical features  
les caracteristiques techniques  
las características técnicas

la confezione  
the packaging  
l'emballage  
el embalaje



**HERITAGE**  
*blend*



**A998**

30x30 R  
11.81"x11.81"  
773026 Heritage Blend





Si consiglia la posa con fuga 2 mm. - Laying with a 2 mm-joint is recommended. - Pose recommandée avec joints de 2 mm. - Se recomienda la colocación con juntas de 2 mm.





**HERITAGE**  
*bits*



30x30 R  
11.81"x11.81"  
773027 Heritage Bits

**A998**




Si consiglia la posa con fuga 2 mm. - Laying with a 2 mm-joint is recommended. - Pose recommandée avec joints de 2 mm. - Se recomienda la colocación con juntas de 2 mm.





**HERITAGE**  
*gala*



30x30 R  
11.81"x11.81"  
773028 Heritage Gala

**A998**




Si consiglia la posa con fuga 2 mm. - Laying with a 2 mm-joint is recommended. - Pose recommandée avec joints de 2 mm. - Se recomienda la colocación con juntas de 2 mm.





**HERITAGE**  
*soho*



30x30 R  
11.81"x11.81"  
773029 Heritage Soho



**A998**



Si consiglia la posa con fuga 2 mm. - Laying with a 2 mm-joint is recommended. - Pose recommandée avec joints de 2 mm. - Se recomienda la colocación con juntas de 2 mm.



**HERITAGE**  
blend. bits. gala. soho.



30x30 R  
11.81"x11.81"  
773026 Heritage Blend



30x30 R  
11.81"x11.81"  
773027 Heritage Bits



30x30 R  
11.81"x11.81"  
773028 Heritage Gala



30x30 R  
11.81"x11.81"  
773029 Heritage Soho

**A998**

Si consiglia la posa con fuga 2 mm. - Laying with a 2 mm-joint is recommended. - Pose recommandée avec joints de 2 mm. - Se recomienda la colocación con juntas de 2 mm.



# HERITAGE

le caratteristiche tecniche  
the technical features  
les caracteristiques techniques  
las características técnicas

## CARATTERISTICHE TECNICHE

Technical specifications | Technische Eigenschaften | Caractéristiques techniques | Características técnicas |

### STANDARD EN 14411 - G

|  | CARATTERISTICHE TECNICHE<br>TECHNICAL DATA<br>TECHNISCHE DATEN<br>CARACTERÍSTICAS TÉCNICAS  | NORMA<br>STANDARD<br>NORM<br>NORME | VALORI PRESCRITTI DALLE NORME EN 14411 - G<br>INTERNATIONAL STANDARDS EN 14411 - G<br>INTERNATIONALE NORMWERTE EN 14411 - G<br>VALEURS PREVUES PAR LES NORMES EN 14411 - G | VALORE MEDIO CERAGRES<br>CERAGRES AVERAGE VALUE<br>CERAGRES MITTELWERT<br>VALEURS MOYEN CERAGRES |
|--|---|------------------------------------|--|--|
|  | <b>CARATTERISTICHE DIMENSIONALI</b> - SIZE CHARACTERISTICS - MASSEIGENSCHAFTEN<br>DETERMINATION DES CARACTERISTIQUES DIMENSIONNELLES -<br>CARACTERÍSTICAS DIMENSIONALES - РАЗМЕРНЫЕ ХАРАКТЕРИСТИКИ - 尺寸特征   |                                    |  | <b>NAT<br/>(UGL)</b>   |
|  | <b>LATI</b><br>SIDES - SEITEN<br>COTES - CANTOS<br>РАЗМЕРЫ СТОРОН - 側邊  | EN ISO 10545-2                     | ± 0,3% MAX<br>(± 1,0 mm MAX)   | CONFORME<br>COMPLYING  |
|  | <b>SPESSORE</b><br>THICKNESS - DICKE<br>ÉPAISSEUR - ESPESOR<br>ТОЛЩИНА - 厚度   | EN ISO 10545-2                     | ± 5,0% MAX<br>(± 0,5 mm MAX)   | CONFORME<br>COMPLYING  |
|  | <b>RETTILINEITÀ DEGLI SPIGOLI</b><br>STRAIGHTNESS OF SIDES - GERADLINIGKEIT DER KANTEN<br>RECTITUDE DES ARETES - RECTITUD DE LOS CANTOS<br>КОСОУГ ОЛЫНОСТЬ - 邊角平直度  | EN ISO 10545-2                     | ± 0,3% MAX<br>(± 0,8 mm MAX)   | CONFORME<br>COMPLYING  |
|  | <b>ORTOGONALITÀ</b><br>RECTANGULARITY - RECHTWINKLIGKEIT<br>PERPENDICULARITÉ - ORTOGONALIDAD<br>КРИВИЗНА СТОРОН - 直角度   | EN ISO 10545-2                     | ± 0,3% MAX<br>(± 1,5 mm MAX)   | CONFORME<br>COMPLYING  |
|  | <b>PLANARITÀ</b><br>SURFACE FLATNESS - EBENFLÄCHIGKEIT<br>PLANEITE DE SURFACE - PLANEIDAD<br>КРИВИЗНА ЛИЦЕВОЙ ПОВЕРХНОСТИ - 平整度   | EN ISO 10545-2                     | ± 0,4% MAX<br>(± 1,8 mm MAX)   | CONFORME<br>COMPLYING  |
|  | <b>ASSORBIMENTO D'ACQUA</b><br>WATER ABSORPTION - WASSERAUFNAHME<br>ABSORPTION D'EAU - ABSORCIÓN DE AGUA<br>ВОДОПОГЛОЩЕНИЕ - 吸水率  | EN ISO 10545-3                     | ≤ 0,5%   | ≤ 0,1%   |
|  | <b>RESISTENZA ALLA FLESSIONE</b><br>FLEXION RESISTANCE - BIEGEFESTIGKEIT<br>RESISTANCE A LA FLEXION - RESISTENCIA A LA FLEXIÓN<br>ПРЕДЕЛ ПРОЧНОСТИ ПРИ ИЗГИБЕ - 抗弯强度  | EN ISO 10545-4                     | S ≥ 700 N (< 7,5 mm)<br>S ≥ 1.300 N (> 7,5 mm)<br>R ≥ 35 N/mm <sup>2</sup>   | S ≥ 2.800 N<br>R ≥ 49 N/mm <sup>2</sup><br>(formato 600x600 24"x24" size)                        |
|  | <b>RESISTENZA ALL'URTO</b><br>IMPACT RESISTANCE - STOSSFESTIGKEIT<br>RESISTANCE AUX CHOCES - RESISTENCIA A LOS GOLPES<br>УДАРНОСТОЙКОСТЬ - 抗冲击强度  | EN ISO 10545-5                     | VALORE DICHIARATO<br>DECLARED VALUE  | > 0,80   |
|  | <b>RESISTENZA ALL'ABRASIONE</b><br>ABRASION RESISTANCE - ABRIEBFESTIGKEIT<br>RESISTANCE A L'ABRASION - RESISTENCIA A LA ABRASIÓN<br>СТОЙКОСТЬ К ИСТИРАНИЮ - 耐磨强度  | EN ISO 10545-6                     | ≤ 175 mm <sup>3</sup>  | < 150 mm <sup>3</sup>  |
|  | <b>COEFFICIENTE DI DILATAZIONE TERMICA LINEARE</b><br>COEFFICIENT OF LINEAR THERMAL EXPANSION - LINEARER WÄRMEAUDEHNUNGSKOEFFIZIENT<br>COEFFICIENT DE DILATATION THERMIQUE LINEAIRE - COEFICIENTE DE DILATACIÓN TÉRMICA LINEAL<br>КОЭФФИЦИЕНТ ЛИНЕЙНОГО ТЕРМИЧЕСКОГО РАСШИРЕНИЯ - 线性热膨胀系数 | EN ISO 10545-8                     | —  | α=7,3x10 <sup>-6</sup> /°C <sup>-1</sup>   |
|  | <b>RESISTENZA AGLI SBALZI TERMICI</b><br>RESISTANCE TO THERMAL SHOCKS - BESTÄNDIGKEIT GEGEN TEMPERATURSCHWANKUNGEN<br>RESISTANCE AUX CHOCES THERMIQUES - RESISTENCIA A LAS CHOQUES TÉRMICOS<br>СТОЙКОСТЬ К ПЕРЕПАДАМ ТЕМПЕРАТУРЫ - 耐热突变性  | EN ISO 10545-9                     | TEST SUPERATO SECONDO EN ISO 10545-1<br>PASS ACCORDING EN ISO 10545-1  | NESSUN DANNO<br>NO DAMAGE  |
|  | <b>RESISTENZA AL GELO</b><br>FROST RESISTANCE - FROSTBESTÄNDIGKEIT<br>RESISTANCE AU GEL - RESISTENCIA AL HIELO<br>МОРОЗОСТОЙКОСТЬ - 耐冻性   | EN ISO 10545-12                    | TEST SUPERATO SECONDO EN ISO 10545-1<br>PASS ACCORDING EN ISO 10545-1  | NESSUN DANNO<br>NO DAMAGE  |
|  | <b>RESISTENZA ALL'ATTACCO CHIMICO</b><br>RESISTANCE TO CHEMICALS - CHEMIKALIENBESTÄNDIGKEIT<br>RESISTANCE A L'ATTAQUE CHIMIQUE - RESISTENCIA QUÍMICA<br>ХИМИЧЕСКАЯ СТОЙКОСТЬ - 耐化学品作用   | EN ISO 10545-13                    | UB MIN.  | UA ULA UHA   |
|  | <b>RESISTENZA ALLE MACCHIE</b><br>RESISTANCE TO STAINS - FLECKENBESTÄNDIGKEIT<br>RESISTANCE AUX TACHES - RESISTENCIA A LAS MANCHAS<br>УСТОЙЧИВОСТЬ К ПЯТНООБРАЗОВАНИЮ - 防污性   | EN ISO 10545-14                    | VALORE DICHIARATO<br>DECLARED VALUE  | 5  |
|  | <b>CESSIONE DI PIOMBO E CADMIO</b><br>LEAD AND CADMIUM DISCHARGE - ABGABE VON BLEI UND CADMIUM<br>PERTE DE PLOMB ET CADMIUM - CESIÓN DE PLOMO Y CADMIO<br>Выделение свинца и кадмия - 铅和镉的释放  | EN ISO 10545-15                    | VALORE DICHIARATO<br>DECLARED VALUE  | < AL LIMITE DI RILEVAMENTO<br>< THAN INSTRUMENT LIMIT  |
|  |   |                                    |  | NAT  |
|  |   | DM. 236/89 BCRA                    | > 0,40   | > 0,40   |
|  |   | ASTM C1028                         | SCOF > 0,60  | > 0,60   |
|  |   | ANSI A137.1                        | Wet DCOF > 0,42  | > 0,42   |
|  |   | AS 4586:2013                       | -  | -  |
|  |   | DIN 51130                          | -  | R9   |
|  |   | DIN 51097                          | -  | -  |
|  |   | ENV 12633                          | ≥ CL1  | CL1  |
|  |   | BS 7976                            | ≥ 36   | ≥ 36   |
|  | <b>SCIVOLosità</b><br>SKID RESISTANCE - RUTSCHWEERT<br>GLISSANCE - ADHERENCIA   |                                    |  |  |

# HERITAGE

la confezione  
the packaging  
l'emballage  
el embalaje

Imballi . Packing . Conditionnement . Verpackungseinheiten . Embalajes .

| FORMATO<br>SIZE<br>FORMAT<br>FORMAT<br>FORMATO | SPESSORE<br>THICKNESS<br>EPAISSEUR<br>STÄRKE<br>ESPESOR | KG/MQ<br>KG/SQM<br>KG/MC<br>KG/QM<br>KG/MQ | SCATOLA<br>BOX<br>BOÎTE<br>KARTON<br>CAJA<br>КОРОБКА                                 | EUROPALLET |     |    |
|--|---|--|--|------------|-----|----|
| 30x30 . 11.81"x11.81"                          | 9 mm . 0,35"  | 15   |  | mq         | box | mq |
|  |   |  |  | 1          | -   | -  |

credits  
concept:  
D.G.A.  
progetto grafico:  
studiodiade & A.V.  
photos & text:  
A.V.

**Ceragres Ceramics Private Limited,: tutti i diritti riservati**

La riproduzione totale o parziale del testo o delle illustrazioni di questo catalogo e vietata e soggetta a sanzioni legali.

**Ceragres Ceramics Private Limited,: all rights reserved**

Total or partial reproduction of text or illustrations of this catalogue is prohibited and is subject to legal sanctions.

**Ceragres Ceramics Private Limited,: tous droits reserves**

La reproduction totale ou partielle du texte ou des illustrations de ce catalogue est interdite et passible de sanctions penales.

**Ceragres Ceramics Private Limited,: todos los derechos reservados**

La reproduccion total o parcial del texto o las ilustraciones de este catalogo esta prohibida y esta sujeta a sanciones legales.



**CÉRAGRÈS**  
LUXE

[touch@ceragresceramics.com](mailto:touch@ceragresceramics.com)  
[www.ceragresceramics.com](http://www.ceragresceramics.com)